

NEW APPLICATION TRANSMITTAL

"Express Mail" mailing label number EH315298685US ; Date of Deposit: 6-Nov-1998

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents, Washington DC 20231.

SHARON GILDEN

(Printed name of person mailing paper or fee)

Sharon Gilden
(Signature of person mailing paper or fee)

Commissioner of Patents and Trademarks
Washington, DC 20231

Sir:

Enclosed herewith for filing is the patent application of:

Inventor(s): Dieter Mauer, Reinhold Oppen, and Joachin Moeser

Title: Conveyor for Elongate Components Designed with a Head and a Shank

Enclosed are:

6 sheets of drawings
12 pages of specification and abstract 2 page(s) of claims

(xx) Declaration/Power of Attorney (xx) unsigned
() Assignment Enclosed

() Certified Copies from which priority is claimed:
Country: Germany Appln. No. 297 19 744.4 Filed: 06 November 1997

CLAIMS AS FILED		BASIC FEE		
FOR	NUMBER FILED	NUMBER EXTRA	RATE	
TOTAL CLAIMS	14 - 20 =	- 0 -	X \$ 22.00	\$790.00
INDEPENDENT CLAIMS	0 - 3 =	- 0 -	X \$ 80.00	- 0 -
TOTAL FEES				- 0 -
				\$790.00

(xx) Please charge any the fees for the filing of this application, as noted above, and additional fees due, or credit any overpayment, to Deposit Account No. 02-2550. (A duplicate copy of this transmittal is enclosed for this purpose.)

Edward D. Murphy
Edward D. Murphy
Attorney for Applicant
Registration No. 20,625

Date: 5 Nov 98

**CONVEYOR FOR ELONGATE COMPONENTS
DESIGNED WITH A HEAD AND A SHANK**

BACKGROUND OF THE INVENTION

The invention relates to a conveyor for elongate components designed with a head and a shank, in particular rivets, screws, weld studs and the like, according to the preamble of claim 1.

It is known to use conveyors for the automated supply of elongate components designed with a head and a shank. These conveyors are used, in particular, for stud welding devices, punch riveting devices or the like.

German Patent No. 2 403 904 discloses a conveyor for elongate components designed with a head and a shank. The conveyor comprises a feed duct which passes into a conveying duct. Inside the conveying duct is arranged a plunger by means of which the component can be conveyed within the conveying duct to a free end portion of the conveying duct. The plunger can be pulled back sufficiently far within the conveying duct that it clears the feed duct. According to German Patent No. 2 403 904, the conveying duct extends such that the components pass into the conveying duct while utilizing the force of gravity. The components are introduced into the feed duct separately. Owing to the design of the conveyor according to German Patent No. 2 403 904, the cycle time of the conveyor is determined substantially by the feed rate of the components within the feed duct.

To improve the cycle times it is known to increase the feed rate of the components.

If the feed rate is increased, however, there is a risk that the components to be fed will jam or tilt within the feed duct.

To solve this problem, for example, U.S. Patent 5,588,576 proposes a feed arrangement comprising a gripping tongs with at least two gripping arms provided with a front gripping region and a rear pivot axis region. The gripping arms are spring loaded and have a portion through which the feed duct to the gripping region of the gripping arms taper. Owing to this design of the feed arrangement, the components which are fed individually at high speed, preferably pneumatically, are initially decelerated and then come to a standstill in the gripping region.

A problem with this feed arrangement which operates quite satisfactorily is that when components with identical geometry but of different materials are exchanged, the deceleration effect of the gripping tongs is too great, so the components do not pass to the transfer region. With components having a very great mass (great weight), it can happen that the deceleration effect is too slight so the component jumps out of the transfer region.

During the feeding of components in a feed conduit, the speed of the component is reduced owing to frictional losses between the component and the feed duct. In particular with relatively long feed conduits, it may happen that the component does not reach the transfer region. It may also happen that the kinetic energy of the component is too low to spread the gripping tongs. To prevent this, the components are conveyed into the feed duct at high speed.

SUMMARY OF THE INVENTION

On the basis of the foregoing, the object of the present invention is to develop the known conveyor such that it can be used for elongate components of different materials designed with a head and a shank.

The conveyor according to the invention for elongate components designed with a head and a shank has a feed arrangement comprising a transfer arrangement. By means of the transfer arrangement, a component is positioned

in a transfer region in which the feed duct comprising a head guiding duct and a shank guiding duct passes into a conveying duct. The transfer arrangement comprises a catching unit comprising at least one catching element, which is arranged opposite the shank guiding duct and penetrates at least partially into the head guiding duct, in particular a catching pawl which can be deflected from the head guiding duct against a spring force.

This design of the conveyor according to the invention ensures that components with a relatively small mass (weight) also pass to the transfer region. The components which are guided in the feed duct, for example by means of compressed air, slide with their head in the head guiding duct and their shank in the shank guiding duct. If the component passes into the region of the catching unit, the head of the component acts on the catch element so the catch element is pressed from the head guiding duct and thus clears the head guiding duct. The catch element as such can be, for example, plate- or strip-shaped in design so it has only a small mass or spring rigidity enabling components having a relatively small mass to pass to the transfer region.

Since the catch element acts on the head of the component, the component can reliably pass into the transfer region as the catch element produces no or only slight moments round an axis extending transversely to the longitudinal axis of the component. This also prevents tumbling of the component during the feed process.

The conveyor according to the invention can be used in stationary tool devices such as robots. It can also be used in manually operated devices such as robots. It can also be used in manually operated devices such as manually operated stud welding devices. To ensure that the component does not leave the transfer region during the handling of a tool with the conveyor according to the invention, as might be possible, for example, during overhead work, it is proposed that at least one catch element have a locking face at least partially limiting the transfer region. This measure ensures that the components which

passes to the transfer region cannot unintentionally slip from it. With the design of the conveyor according to the invention, a component can also be conveyed to the transfer region at a relatively slow speed because the component, in contrast to the state of the art, is not decelerated or is decelerated only to a limited extent by the catch element.

According to a further advantageous development of the conveyor, it is proposed that at least one catch element is articulated on one side. The catch element has a free portion which penetrates at least into the head guiding duct. This development allows a constructional embodiment of the catch unit in which the expenditure is low. The catch element can be, for example, tongue-shaped in design.

According to a further advantageous design of the conveyor, it is proposed that at least one catch element has a least one portion consisting of a resilient material.

The deflection of the catch element from the head guiding duct can be influenced by appropriate choice of the resilient material. The resilient material is preferably a spring steel. Instead of a catch element made of a spring steel, the catch element can consist at least in part of a plastics material. In particular, the portion of the catch element forming the locking face consists of a resilient material so an impact by the component can be absorbed. A deceleration effect of the catch element can be achieved or varied by appropriate choice of the resilient material and of the geometry of the catch element.

According to a further advantageous design of the conveyor, it is proposed that at least one catch element be pivotal round an axis. At least one spring element acts on the catch element. The spring element can be, for example, a torsion spring which simultaneously forms the axis on which the catch element is articulated.

To increase the availability of the conveyor, it is proposed that the spring element be a compression spring which is arranged between the axis and the end portion of the catch element. During a breakage of a winding of the compression spring, the operability, although restricted, is maintained so the desired aim of this development, an increase in the availability of the conveyor, is achieved.

To enable the component to adopt a defined position or location in the transfer region, it is proposed according to a further advantageous design of the conveyor that the transfer arrangement have two relatively displaceable positioning segments, the positioning segments defining a recess through which a component can be brought into the conveying duct. The positioning segments are displaceable relative to one another such that, when the positioning segments are moved away from one another, the recess widens so that a component can pass through this recess into the conveying duct. The positioning segments are pressed apart by the head of the component. The component can be, for example, T-shaped in design. The component is preferably so designed that the diameter of the head corresponds substantially to the length of the shank. The design of the conveyor according to the invention also prevents a component from jamming within the transfer arrangement. The conveyor therefore operates without disturbance.

The positioning segments preferably have a form corresponding substantially to the cross section of the feed duct. They simultaneously form an end portion of the feed duct.

The positioning segments are displaceable substantially transversely to the longitudinal direction of the conveying duct. The positioning segments are preferably forcibly guided. The conveyor can have suitable guide means for this purpose, which cooperate with the positioning segments. The guide can

be embodied, for example, by a tongue and groove guide. Other guides are also feasible.

The positioning segments are preferably displaceable against a spring force. This measure ensures that, after a component has been introduced through the recess into a conveying duct, the positioning segments are returned by the spring force into their starting position in which the positioning segments receive a component in the transfer region.

To ensure that, during conveyance of the components in the conveying duct to an aperture of the conveying duct, the components do not change their location, it is proposed according to a further design of the conveyor that the conveying duct be formed by a split sleeve. The split sleeve has a first end portion adjacent to the transfer region and a second end portion remote from the transfer region. The cross section of the conveying duct tapers conically substantially from the first end portion to the second end portion. At least one resilient element is arranged at the second end portion of the conveying duct, which also comprises an aperture through which the component can issue from the conveying duct. During transportation of a component from the first end portion or from the transfer region to the second end portion, the sleeve is enlarged by the component in the conveying duct against the action of at least one resilient element. Once the component has left the sleeve or the conveying duct, the sleeve is compressed by at least one resilient element.

Further details and advantages of the design of the conveyor according to the invention will be described with reference to a preferred embodiment illustrated in the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

5 FIG. 1 is a perspective view of a conveyor;

FIG. 2 is a solid section of a conveyor;

10 FIG. 3 is an exploded view of a part of the conveyor according to
FIGS. 1 and 2;

FIG. 4 shows a further embodiment of a conveyor;

15 FIG. 5 is a magnified view of a conveying duct of the conveyor with a
component in the transfer region.

FIG. 6 shows the conveyor according to FIG. 5 with a component in the
aperture region of the conveying duct.

20 FIG. 7 is a perspective view of a feed duct with a component.

DETAILED DESCRIPTION OF THE INVENTION

25 FIG. 1 shows, in part, a conveyor for elongate components designed with
a head and a shank. The conveyor comprises a casing 1. The casing 1
comprises a connecting piece 2 by means of which the casing 1 can be
connected to a feed conduit 3. For fixing the feed conduit 3 on the casing 1
there is provided a connecting member 4 which is connected to the casing 1 or
the connecting piece 2 by screws 5 and 6.

30 The conveyor comprises a feed arrangement 7 having a transfer
arrangement 8. The transfer arrangement 8 comprised two positioning
segments 9, 10. The positioning segments 9, 10 partially limit a feed duct 11
which is continued in the connecting piece 2 and the feed conduit 3.

The remainder of a conveyor is described with reference to the embodiment illustrated in FIG. 2.

5 The conveyor is proposed for elongate components 12 designed with a head and a shank. The components 12 can be fed to the conveyor via a feed conduit 3. The feed conduit 3 comprises a feed duct 11. The feed duct 11 comprises a head guiding duct 13 and a shank guiding duct 14. The conveyor comprises a feed arrangement 7 comprising a transfer arrangement 8. The
10 transfer arrangement is formed in a transfer region 15 in which the feed duct 11 passes into a conveying duct 16. A component 12 is shown in the transfer region 15 in the embodiment shown in FIG. 2.

15 The transfer arrangement 8 comprises a catch unit 17. The catch unit 17 comprises a catch element 18 which is arranged opposite the shank guiding duct 14 and penetrates at least partially into the head guiding duct 13. The catch element 18 can be deflected from the head guiding duct 13 against a spring force.

20 The catch element 18 is L-shaped in design in FIG. 2. One arm 19 of the catch element 18 is fixed on the connecting member 4. The catch element 18 is therefore articulated on one side. The other arm 20 of the catch element 18 which penetrates at least partially into the head guiding duct 13 has a free end portion 21. The end portion 21 has a locking face 22 by means of which the
25 transfer region 15 is at least partially limited. The catch element 18 preferably consists of a resilient material.

30 As shown in FIG. 2, the locking face 22 rests on a head of the component 12 in the transfer region 15 so the component 12 is positioned in the transfer region.

A plunger 23 which can be brought to rest on the head of the component 12 so that the plunger pushes the component 12 into the conveying duct 16 is provided for conveying the component 12 from the transfer region 15 into the conveying longitudinal direction of the conveying duct 16. The plunger 23 can be pushed back so a further component can be introduced into the conveying duct 16. The plunger 23 can be, for example, an actuating tool by means of which, for example, a self-punching rivet or the like can be driven into the workpieces to be connected.

The mode of operation of the device is described hereinafter with reference to FIGS. 1, 2 and 3. A component 12 which comprises a head and a shank is conveyed pneumatically in the feed conduit 3 which comprises a feed duct 11 to the feed arrangement 7. The head of the component 12 comes to rest on the catch element 18 which penetrates partially into the head guiding duct 13 of the feed duct 11. The component 12 presses the catch element 18 from the head guiding duct 13, the component 12 being slightly decelerated. It passes into the transfer region 15 at reduced speed. A transfer arrangement 8 which comprises two relatively displaceable positioning segments 9, 10 is provided in the transfer region 15. The positioning segments 9, 10 are so designed that they form a portion of the feed duct 11. The positioning segments 9, 10 limit a recess 24 through which the component 12 can be introduced into the conveying duct 16. Each positioning segment 9, 10 is pivotal round a respective pivot axis 25, 26. Each positioning segment 9, 10 is pivotal against a respective spring force of spring 27, 28. FIG. 1 shows that the free end portions of the positioning segments 9, 10 which rest opposite the pivot axis 25, 26 rest on stop faces 29, 30 formed in the casing so the respective spring 27, 28 does not press the respective positioning segment 9, 10 into the duct cross section of the feed duct 11.

If the component presses into the transfer region 15, the component 12 can be conveyed from the transfer region 15 by the plunger 23 in the conveying duct 16.

10 The conveying duct 16 is formed by split sleeve 31. The split sleeve 31 is arranged in a casing sleeve 32. The casing sleeve 32 is connected to the casing 1. The casing sleeve 32 is preferably connected to the casing 1 by a screw connection. For fixing the split sleeve 31, the split sleeve 31 has a flange 33 which is introduced between an end face of the casing sleeve 32 and the casing 1.

15 The split sleeve 31 has a first end portion 34 adjacent to the transfer region 15 and a second end portion 35 remote from the transfer region 15. Two resilient elements 36 which are introduced into corresponding grooves 37 in the split sleeve 31 are arranged on the second end portion 35. The cross section of the conveying duct 16 tapers substantially from the first end portion 34 to the second end portion 35.

20 If the component 12 is introduced by the plunger 23 into the conveying duct 16 and is conveyed therein to the second end portion 35, the cross section of the conveying duct 16 is enlarged by the component 12 against the action of the elastic elements 36. This design of the conveying duct ensures that the component 12 invariably adopts a predetermined location within the conveying duct. The above-described procedure can be seen, in particular, from FIGS. 5 and 6 which show snapshots of the feeding of a component 12.

25 We will now refer to the embodiment of a conveyor shown in FIG. 4. The basic construction of this conveyor coincides with the construction of the conveyor shown in FIGS. 1 and 3. Identical parts of the conveyors are therefore provided with identical reference numerals.

30 The conveyor shown in FIG. 4 differs from the conveyor shown in FIGS. 1 and 3 by the design of the catch unit 17.

The catch unit 17 has a catch element 18 which is pivotal round an axis 38. A spring element 39 is a compression spring which is arranged partially in a bore 40 in the connecting member 4. The spring element 39 is substantially perpendicular to the catch element 18. The spring element is arranged between the axis 38 and the end portion 21 of the catch element 18.

If a component 12 is conveyed in the feed duct 11 to the transfer arrangement 8, the component 12 passes to the catch element 18 along which the component 12 slides. The catch element 18 which penetrates into the head guiding duct 13 is pivoted, in the path of the component 12 to the transfer region 15, by the component 12 round the axis 38 against the action of the spring element 39 out of the head guiding duct 13. The component 12 then passes into the transfer region 15. This transfer region 15 is partially limited by the locking face 22 of the catch element 18. The component 12 passes from the transfer arrangement 8 by means of the plunger 23 into the conveying duct 16.

A feed conduit 3 with a conveying duct 11 is shown schematically in FIG. 7. The conveying duct 11 has a shank guiding duct 14 and a head guiding duct 13. The cross-sectional configuration of the feed duct 11 can be adapted to the component 12 which is an elongate component having a head 41 and a shank 42. During conveyance of the component 12 in the feed duct 11, the lower face 43 of the head 41 slides on the guide face 44 of the head guiding duct 13 against which the lower face 43 is pressed by the catch elements 18.

WHAT IS CLAIMED IS:

1. Conveyor for elongate components (12) designed with a head (41) and a shank (42), with a feed arrangement (7) comprising a transfer arrangement (8) with a transfer region (15) in which a feed duct (11) comprising a head guiding duct (13) and a shank guiding duct (14) passes into a conveying duct (16) in which a component (12) can be positioned, characterized by a transfer arrangement (8) which comprises a catch unit (17) having at least one catch element (18) which is arranged opposite the shank guiding duct (14), penetrates at least partially into the head guiding duct (13) and can be deflected from the head guiding duct (13) against a spring force.
2. Conveyor according to claim 1, characterized in that at least one catch element (18) has a locking face (22) at least partially limiting the transfer region (15).
3. Conveyor according to claim 1 or 2, characterized in that at least one catch element (18) is articulated on one side, a free end portion (21) of the catch element (18) penetrating at least partially into the head guiding duct (13).
4. Conveyor according to claims 1, 2 or 3, characterized in that at least one catch element (18) has at least one portion consisting of a resilient material.
5. Conveyor according to claim 4, characterized in that the resilient material is a spring steel.
6. Conveyor according to claim 4, characterized in that the resilient material is a plastics material.
7. Conveyor according to claim 1, 2 or 3, characterized in that at least one catch element (18) is articulated pivotally round an axis (38) and at least one spring element (39) acts on the catch element (18).
8. Conveyor according to claim 7, characterized in that the spring element (39) is a compression spring which is arranged between the axis (38) and the end portion (21) of the catch element (18).

9. Conveyor according to one of claims 1 to 8, characterized in that the transfer arrangement (8) comprises two relatively displaceable positioning segments (9, 10), the positioning segments (9, 10) defining a recess (24) through which a component (12) can be introduced into the conveying duct (16).

10. Conveyor according to claim 9, characterized in that the positioning segments (9, 10) are displaceable against a spring force.

11. Conveyor according to claim 9 or 10, characterized in that each positioning segment (9, 10) is pivotal round a respective pivot axis (25, 26).

12. Conveyor according to claim 9, 10 or 11, characterized in that the positioning segments (9, 10) have a form substantially corresponding to the cross section of the feed duct (11).

13. Conveyor according to one of claims 9 to 12, characterized in that each positioning segment (9, 10) can assume an end position in which the positioning segments (9, 10) form a portion of the feed duct (11).

14. Conveyor according to one of claims 1 to 13, characterized in that the conveying duct (16) is formed by a split sleeve (31) which comprises a first end portion (34) adjacent to the transfer region (15) and a second end portion (35) remote from the transfer region (15) and at least one resilient element (36) is arranged on the second end portion (35), the cross section of the conveying duct (16) tapering conically substantially from the first end portion (34) to the second end portion (35) and being enlargeable against the action of the element (36).

ABSTRACT OF THE INVENTION

The invention relates to a conveyor for elongate components (12)
 5 designed with a head and a shank. The conveyor comprises a feed
 arrangement (7). The feed arrangement (7) comprises a transfer arrangement
 (8) with a transfer region (15) in which a component (12) can be positioned. In
 the transfer region (15), a feed duct (11) having a head guiding duct (13) and a
 shank guiding duct (14) passes into a conveying duct (16). The transfer
 10 arrangement (8) comprises at least one catch unit (17). The catch unit (17)
 comprises at least one catch element (18). The catch element (18) is arranged
 opposite the head guiding duct (13) and penetrates at least partially therein. It
 can be deflected from the head guiding duct (13) against a spring force.

0137358 110678

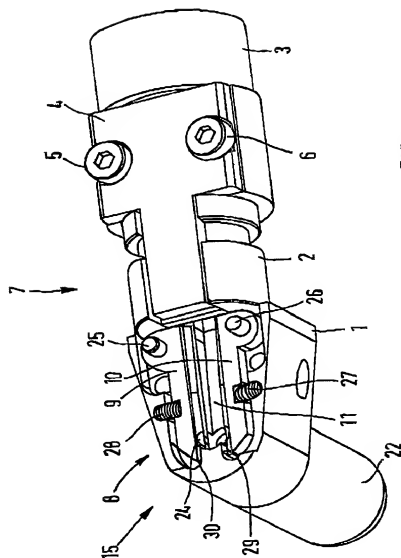
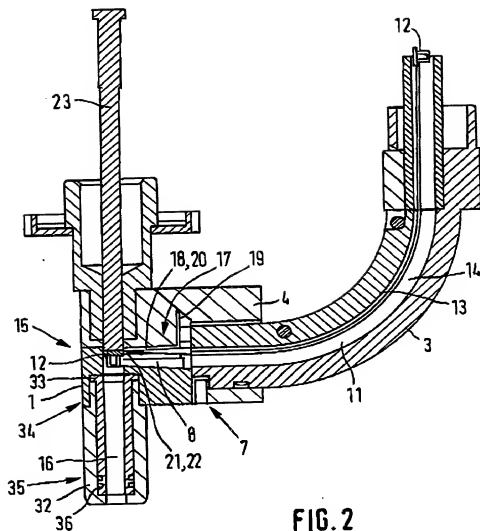


FIG. 1



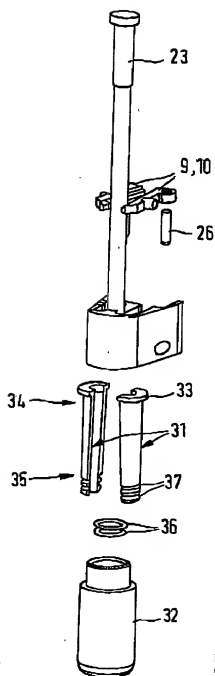


FIG. 3

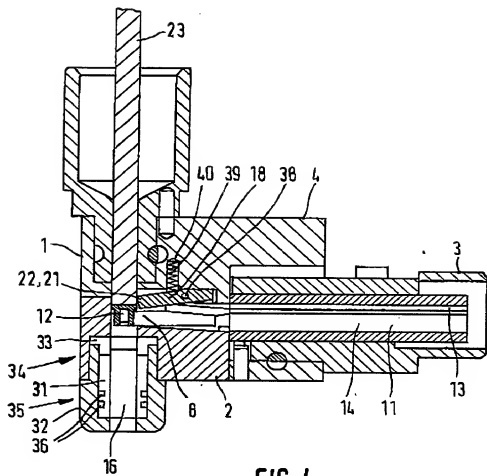


FIG. 4




FIG. 5


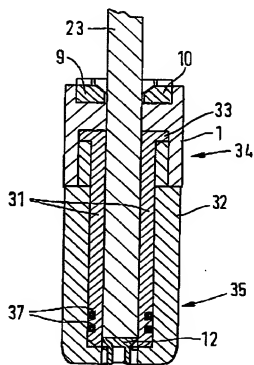


FIG. 6

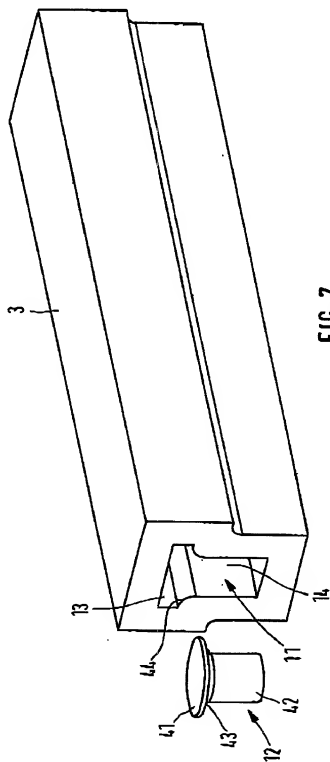

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that: my residence post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **CONVEYOR FOR ELONGATE COMPONENTS DESIGNED WITH A HEAD AND SHANK** the specification of which is attached hereto unless one of the following boxes below is checked:

- () The Specification was filed on _____, was assigned Serial No. _____.
- () was filed as PCT international application number _____ on _____ and was amended under PCT Article 19 on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows:

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below:

Prior Foreign Application(s)			Priority Claimed
<u>29719744.4</u>	<u>Germany</u>	<u>November 6, 1997</u>	<u>X</u>
(Number)	(Country)	(Month/Day/Year Filed)	Yes No
_____	_____	_____	Yes No
(Number)	(Country)	(Month/Day/Year Filed)	Yes No

09187353-110693

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months Prior To The Filing Date of This Application:

Country	Application No.	Date of Filing
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application No.)	_____ (Filing Date)	_____ (Status-Patent, Pending, Abandoned)
_____ (Application No.)	_____ (Filing Date)	_____ (Status-Patent, Pending, Abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark

Office connected therewith and in connection with the resulting, patent based on instructions received from the entity who first provides said attorneys with a written notice to the contrary:

Edward D. Murphy, Esq., Registration No. 20,625
Dennis A. Dearing, Esq., Registration No. 26,653
John D. Del Ponti, Esq., Registration No. 24,258
J. Bruce Hoofnagle, Esq., Registration No. 20,973
Charles E. Yocum, Esq., Registration No. 30,121
Spencer T. Smith, Esq., Registration No. 25,926

Send Correspondence to: Edward D. Murphy
Patent Department - TW 999
The Black & Decker Corporation
701 East Joppa Road
Towson, Maryland 21286
Tel. (410) 716-2867

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity or the application or any patent issued thereon.

03167350-110693

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Dieter	Mauer		
RESIDENCE (CITY, STATE & COUNTRY)			CITIZENSHIP
Lollar, Germany			German
POST OFFICE ADDRESS (COMPLETE STREET ADDRESS INCLUDING CITY, STATE & COUNTRY)			
Ostendstrasse 10, 35457 Lollar, Germany			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Reinhold	Oppen		
RESIDENCE (CITY, STATE & COUNTRY)			CITIZENSHIP
Alten-Buseck, Germany			German
POST OFFICE ADDRESS (COMPLETE STREET ADDRESS INCLUDING CITY, STATE & COUNTRY)			
Daubringer Strasse 20, 35418 Alten-Buseck, Germany			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
Joachim	Möser		
RESIDENCE (CITY, STATE & COUNTRY)			CITIZENSHIP
Ulrichstein-Bobenhhausen, Germany			German
POST OFFICE ADDRESS (COMPLETE STREET ADDRESS INCLUDING CITY, STATE & COUNTRY)			
Hoherodskopfstrasse 24, 35327 Ulrichstein-Bobenhhausen, Germany			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
RESIDENCE (CITY, STATE & COUNTRY)			CITIZENSHIP
POST OFFICE ADDRESS (COMPLETE STREET ADDRESS INCLUDING CITY, STATE & COUNTRY)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE
RESIDENCE (CITY, STATE & COUNTRY)			CITIZENSHIP
POST OFFICE ADDRESS (COMPLETE STREET ADDRESS INCLUDING CITY, STATE & COUNTRY)			

00100350-1000